

Converts coaxial or Toslink digital audio cable to analog L/R phono audio. This enables you to connect to an external device, such as an amplifier or sound bar via standard RCA phono jacks.

**Kit Contents:**


- Digital to analog audio converter.
- 5V DC power supply.
- User manual.

**Instructions:**

Prior to installation, please make sure all devices are switched off.

1. Connect the audio source device to the converter via Toslink or coaxial cables.
2. From the converter L/R output, connect the A/V receiver or amplifier.
3. Connect the 5V power supply to the converter.

Note: If both coaxial and Toslink cables are connected to the device, it will give priority to the Toslink input.

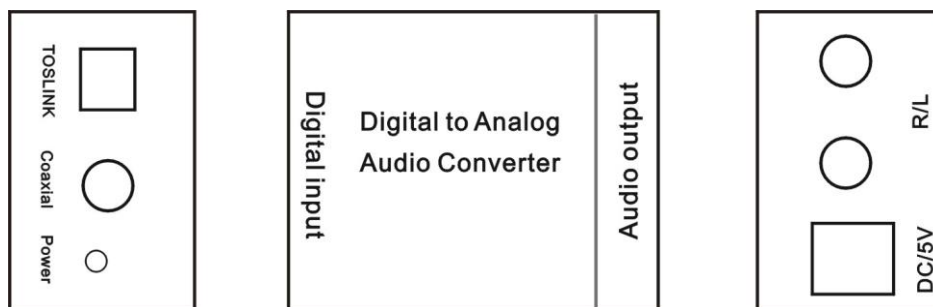

**Features:**

- Converts Coaxial or Toslink digital audio signals to analog L/R audio
- Supports sampling rate at 32, 44.1, 48 and 96KHz.
- 24-bit S/PDIF incoming bit stream on left and right channels
- Provides electromagnetic-noise-free transmission.
- Easy to install and simple to operate.

**Specifications:**

Input Audio	Coaxial or Toslink digital audio
Output Audio	L/R audio
Input audio connector	Toslink 1 X RCA (Coaxial)
Output audio connector	2 X RCA (R/L)
Sampling rate	32, 44.1, 48 and 96KHz
Operating Temperature	0 °C to +70°C
Operating Humidity	10% to 85 % RH (no condensation)
Storage Temperature	-10°C to +80°C
Storage Humidity	5% to 90 % RH (no condensation)
External Power Supply	5V DC@1A
Power Consumption	0.5 watts (max)
Converter Unit	FCC, CE, UL
Power Supply	UL, CE, FCC
AC Power Adapter	US standard, UK standard and so on