

PRODVC12
SCART to HDMI Video Converter and Scaler



This universal SCART To HDMI converter is for analog SCART input to HDMI 1080p (60Hz) output, enabling you to connect an older device with a SCART output to a HDMI monitor, projector or TV.

Kit Contents:


- SCART to HDMI converter.
- 5V DC 1A power adapter.
- User manual.

Features:

- No need to install drivers.
- Provide advanced signal upscaling to ensure good precision, colours, resolutions, and detail.
- Supports PAL, NTSC3.58, NTSC4.43, SECAM, PAL/M, PAL/N standard TV formats input.
- Supports HDMI 1080p or 720p output.

Instructions:

1. Connect the device with the SCART output (CCTV, DVD player, VCR etc.) to the SCART input of the converter.
2. From the converters HDMI output connect to the HDMI Monitor or TV.
3. Plug the power supply into the converter and plug it into the mains. Always do the video connections before powering the converter.

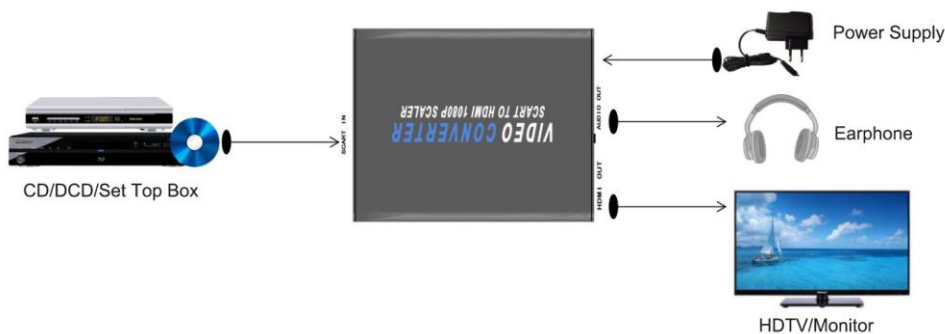

Problem	Solutions
No Power	Check if the power supply is inserted into the power socket and the wall power switch is turned on.
No Sound/ Abnormal Sound	<ol style="list-style-type: none"> 1. Confirm sound channels are working on output device. 2. Confirm the output device audio is in the supported standard mono/stereo format. 3. Confirm the amplifier/TV set volume is not muted.
No Picture/ Abnormal Picture	<ol style="list-style-type: none"> 1. Please make sure the signal source and the TV are turned on and connected to the item correctly. 2. Check whether the signal source output resolution is set correctly. 3. Reboot to reset EDID. 4. Please use PROception high quality cables.


PRODVC12
SCART to HDMI Video Converter and Scaler

PROception

Specifications:

SCART Input	PAL,NTSC3.58. NTSC4.43, SECAM, PAL/M, PAL/N
HDMI Output	1080p/720p
HDMI Output Cable Distance	≤7m AWG26 HDMI Standard Cable
SCART Input Cable Distance	≤8m AWG26 SCART Standard Cable
Max Working Current	250mA
Power Adapter Format	AC 100V-240V 50/60HZ, DC 5V/1A
Operating Temperature Range	-10~+55 °C
Storage Temperature Range	-20~+60 °C
Operating Humidity Range	10~90%RH(No Condensation)
Storage Humidity Range	5~95%RH(No Condensation)
Case Dimension	89.5x71x27.3 (mm)
Weight	115g

Operation controls and Functions:

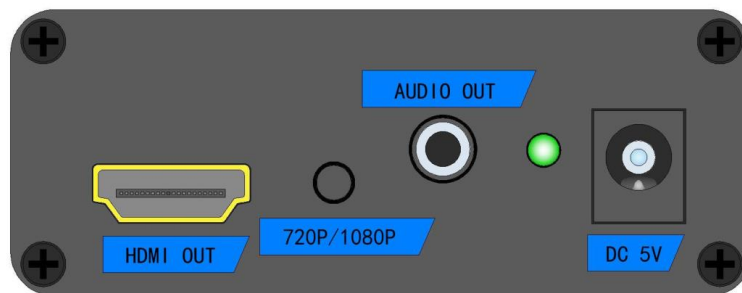

HDMI OUT: Use a HDMI cable to connect the converter to your TV.

720P/1080p: Output video resolution switch button.

AUDIO OUT: Analog audio output.

DC/5V: DC power.