


OUTLET PLATES

A comprehensive range of high-quality outlet plates designed to cover the majority of UK application requirements. All types are non-isolated and are fully-screened with excellent EMC performance. All products fit standard 35 mm deep flush or surface mounting boxes to BS 4662 dimensions.

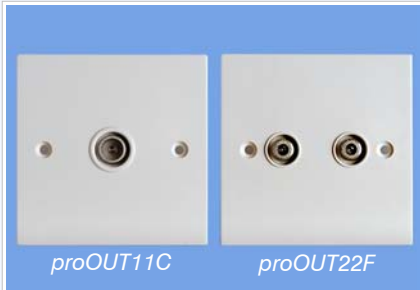

Single and double outlets

These provide 'straight-through' wideband connections.

Features

- Reliable screw-clamp cable connections.
- Slim modules allow generous wiring space.
- 'IEC' and 'F' connector types available.
- Dual-F type available for Sky+ and similar applications.
- Low RF insertion loss and excellent 75 Ω impedance matching.



Diplexed and triplexed outlets

These accept a single incoming cable and selectively split the signal to the appropriate outlet sockets.

Features

- Diplexed TV / RADIO plate with two 'IEC' connectors – TV side covers the UHF and return-path bands; RADIO side covers Bands II and III for FM and DAB radio.
- Triplexed SAT / TV / RADIO plate – adds an 'F' connector for satellite.



Combination 'master' outlets

These popular accessories fit a double-gang mounting box and are intended for use in systems where a 'return' signal is fed back to a distribution hub such as a PROception starBOX.

Features

- Triplexed SAT / TV / RADIO outlets for incoming signals from hub or aerial equipment.
- Option for second SAT connection for Sky+ and Sky HD.
- Wideband return input for back-feed to distribution hub.
- Telephone line-jack connector for connecting set-top box modem.

Selection guide

| Product code | No. of cables* | No. of outlets | Wide-band | FM & DAB | UHF TV † | SAT | SAT 2 | Return inlet | Phone jack ‡ |
|--------------|----------------|----------------|-----------|----------|----------|-----|-------|--------------|--------------|
| proOUT11C | 1 | 1 | ■ | ■ | ■ | – | – | – | – |
| proOUT11F | 1 | 1 | ■ | ■ | ■ | ■ | – | – | – |
| proOUT22F | 2 | 2 | ■ | ■ | ■ | ■ | ■ | – | – |
| proOUT12C | 1 | 2 | – | ● | ■ | – | – | – | – |
| proOUT13 | 1 | 3 | – | ● | ● | ■ | – | – | – |
| proOUT24RT | 2 | 3 | – | ● | ● | ■ | – | ■ | ■ |
| proOUT35RT | 3 | 4 | – | ● | ● | ■ | ■ | ■ | ■ |

* Cable count includes all RF connections, but excludes any telephone connection.

† In all cases the TV connection provides return-path band coverage (5 – 60 MHz).

‡ Telephone jacks are secondary type.

● Covers this band or includes this feature.

■ Covers this band or includes this feature and provides DC continuity.

A detailed technical data sheet is available on request, or from our Web site at www.proception.co.uk.

Sky+ and Sky HD are registered trade marks of British Sky Broadcasting Group PLC.

Performance data given are typical unless otherwise stated, and are not intended to constitute a contractually binding specification. Proception Limited reserves the right to change product designs and specifications without notice.