

PROHDCPCV11 HDCP 2.2 to HDCP 1.4 Converter




Converts HDCP 2.2 to HDCP 1.4 so that older devices can be used with newer HDCP 2.2 devices.

Kit Contents:

- HDCP converter.
- 5V DC power supply.
- User manual.

Product Diagram:

1. Power input.
2. HDCP 2.2 input.
3. Signal status indicator.
4. Power status indicator.
5. HDCP 1.4 output.

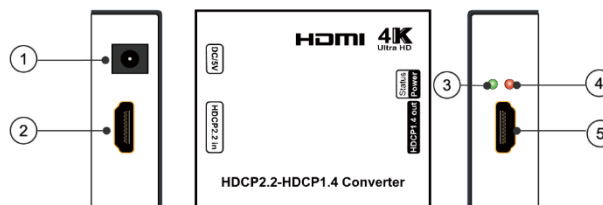


Instructions:

Device is not "hot swappable" always disconnect power before inserting or removing any cable.

1. Connect the 4K HDMI source to the HDCP 2.2 input.
2. Connect the receiving device to the HDCP1.4 output.
3. Connect the 5V power supply to the converter.

Connection Diagram:

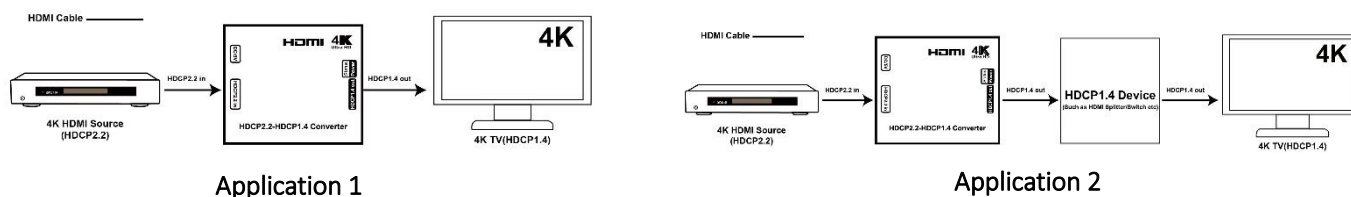

Features:

- HDMI IN, HDMI OUT, compliant HDMI 1.4B.
- Converter HDCP 2.2 to HDCP1.4.
- Support 4Kx2K@60HZ, YUV 4:2:0.
- Support audio format Dolby, DTS, LPCM.
- Support 3D, CEC.
- Support 5V 1A.

Specifications:

Operating Temperature Range	-5 to +35°C (+23 to +95°F)
Operating Humidity Range	5 to 90%RH (No Condensation)
HDMI input	HDCP2.2
HDMI output	HDCP1.4
Video Format Supported	DTV/HDTV:480i/576i/480P/576P/720P/1080i/1080P/4Kx2K 3D video support
Maximum video Format	4Kx2K@60Hz, YUV 4:2:0
HDMI input	1xHDMI (Standard Type A connector)
HDMI output	1xHDMI (Standard Type A connector)
Support Video Color Format	xv-YCC/deep color 36bit
Support Audio Format	DTS-HD Master Audio, Dolby true-HD. LPCM
Power consumption	1.5 watts (Maximum)